


Eco-Cove Integral



LED Cove Lighting

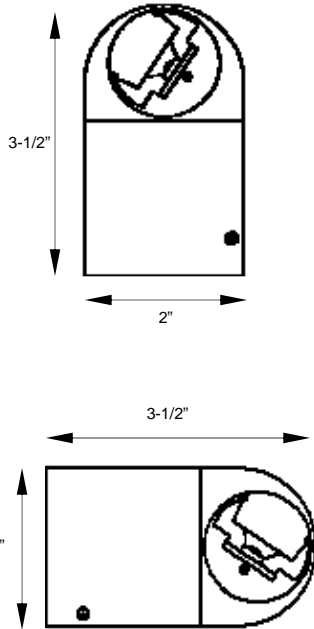

Description

- Linear adjustable cove light with 3 Watt LED lamp and electronic driver
- Proprietary LED board design provides individual LED monitoring for uniform power and full lifespan
- 2 wire operation—safe, low voltage 24V DC operation
- 100,000 hour life*
- Built-in surge/transient protection—preventing harmful effects from brownout/blackout or inconsistent power supplies
- Reverse protection—prevents damage from incorrect installation
- Proprietary extrusion design for optimum thermal management
- Up to 815 Lumens per foot
- Dimmable system
- Remote power supply version available
- Mercury Free

Housing & Available finishes

- Extruded aluminum housing and aluminum end plates
- Other finishes available
- Custom sizes also available


Mounting Options

- Integral driver in through-wire channel shown
- Remote driver version available

Lamp & Driver

- LED lamps included
- UV free light output
- 100,000 hour lamp life*
- Electronic driver provides constant current

Candela Curve

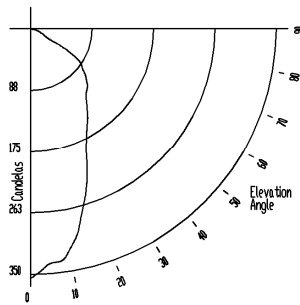

Part #

- -



LEDs
@ 1 per 2.66"


Fixture
Length

Color Temperature
W—Warm (3000—3500K)
N—Neutral (4000—4500K)
C—Cool (5000—5500K)

Eco-Cove Remote



LED Cove Lighting

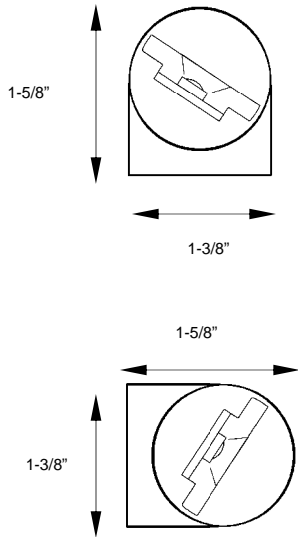


Description

- Linear adjustable cove light with 3 Watt LED lamp and electronic driver
- Proprietary LED board design provides individual LED monitoring for uniform power and full lifespan
- 2 wire operation—safe, low voltage 24V DC operation
- 100,000 hour life*
- Built-in surge/transient protection—preventing harmful effects from brownout/blackout or inconsistent power supplies
- Reverse protection—prevents damage from incorrect installation
- Proprietary extrusion design for optimum thermal management
- Up to 815 Lumens per foot

Housing & Available finishes

- Extruded aluminum housing and aluminum end plates
- Satin Anodized finish
- Other finishes available
- Custom sizes

Candela

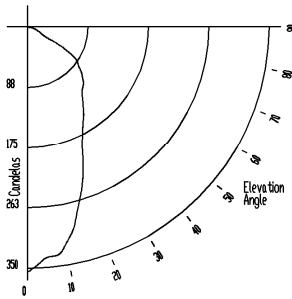

Mounting Options

- Remote driver in approved enclosure
- Integral driver version with through wiring channel available

Lamp & Driver

- LED lamps included
- UV free light output
- 100,000 hour lamp life*
- Electronic driver provides constant current

Part



LEDs
@ 1 per 2.66"

Fixture
Length

Color Temperature
W—Warm (3000—3500K)
N—Neutral (4000—4500K)
W—Cool (5000—5500K)